

DA1275

DECT Repeater

Manual



page

- 3** Start-Up with DSL Router
- 4** Activating Multicell Mode
- 5** Operational Place of Repeater
- 6** Start-up with DECT GAP Base Station
- 7** Start Configuration
- 8** Cascading
- 9** ex-works-setting (Reset)
Connectors, LED, USB, Button
- 10** Software Upgrade
Question and Answers (FAQ), Registration via PC APP
- 11** Security Advices
- 12** Warranty
- 13** Recycling
- 14** CE Conformity

Congratulations

You have chosen an innovative DECT Repeater: [DA1275](#)

In order to extend the DECT range of DSL Router – e.g. Speedport of T-COM or O2 HomeBox – a new Repeater technology has been developed.

This technology has been derived from professional Multicell Networks and got the name [SATELLITE Mode](#) (SAT Mode). Applying SAT Mode to your DECT interface of your DSL-Router you can double the range with full encryption.

DA1275 can be used in traditional DECT [REPEATER Mode](#) (REP Mode) for all Standard DECT GAP Base.

In case of REP Mode directly go to page 6

We wish you best DECT radio reception at any place in your home!

Start-Up with DSL-Router (SAT Mode)

(Deutsche Telekom Speedport, O2 HomeBox, TP-Link Router,...)

1. place and switch-on DA1275 and Handsets near Router 

2. press „Registration“ at Router

wait till LED3 is flashing  (see p.9 LED)

→ System PIN Basis „0000“ otherwise see p.10

3. register DECT Handset (see Manual Handset)

Handset is correctly registered 

otherwise go to Pos. 2 and repeat

4. switch OFF Handset

READY

Go to step2 in case more DECT Handsets shall be registered


Activating Multicell Mode

Go to next page in case you do not register a Gigaset Handset

1. Activate „Subscription Mode“ of DA1275 Repeater

Press **3 times** Side Key in short intervals

LED2 : yellow flash



2. Subscribe DECT-Handset

(see Manual Handset: „Registration to Base“)

→ Important: choose next free Base

Hint: System Code „0000“

3. DA1275 will return to operational mode



4. choose in Menu DECT Handset „Best Base“

5. switch OFF Handset

READY



→ If Handset does not support multiple subscriptions (Base1, Base2,...), this Handset is not suitable

Operational Place of Repeater

→ be sure to have your DECT-Handsets with you

For best selection of operational place follow below rules a-c

a **divide in half the distance** between DECT handset and DECT base

b distance of **Repeater to Base** shall not be smaller than **10 Meter**

c **LED2 green**



After DA1275 has been setup, sequentially switch ON handsets

You have installed encrypted range extension for your DSL Router

Now you can place your Handsets anywhere in your home. The Handsets will automatically select the suitable radio cell.

Please consider that only 2 Handsets can be simultaneously used in Repeater cell.

Start-Up with DECT Base (REP Mode)

(commercially available DECT GAP Base Station)

1. switch-on DA1275 near Base Station



2. switch-on **Repeater Mode** of DECT Base Station

(see Manual of DECT Base Station)

3. press „Registration“ at DECT Base Station

4. wait till DA1275 is in operational mode




Ready

take DA1275 to operational place of Repeater

Star Configuration in REP Mode

Up to 5 Repeater can be configured in a star around the DECT Base.

Follow chapter „SET-UP with DECT Base Station“ and set sequentially all DA1275 Repeater in operation. Please assure that all Repeaters are close together at DECT Base and switched-on during the whole process.



After registration place the Repeaters at their individual operational place and assure that the DECT Link quality (LED2 green) of each Repeater with respect to the Base station.


In case a single Repeater must be exchanged, all other Repeaters must be taken back to the Base Station and switched on, prior to start the registration of the new Repeater.

Cascading in REP Mode

Max 2 Repeater can be cascaded. The configuration as Cascade or Star is done automatically.

DA1275 is analysing the DECT radio link and in case the link quality to the Base is

insufficient, the Repeater establish a cascade to the neighboring Repeater.

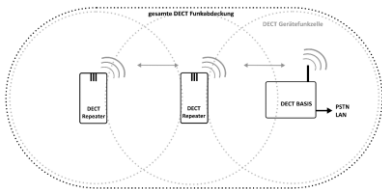

If you change the operational position of Repeater, the configuration can be automatically changed as cascade or star.


Follow chapter „SET-UP with DECT Base Station“ and set sequentially all DA1275 Repeater in operation. After registration place the Repeaters at their individual operational place

→ Cascades are not always supported by DECT Base Stations (hop=0). Contact the manufacturer of the DECT Base to get more information.


ex-works-setting (RESET)

Press Side Key for 5 seconds to activate the RESET function of the product. All settings are reset to ex-works conditions

After RESET the DA1275 Repeater is automatically starting the SEARCH Mode for DECT Base Station.



Connectors, LED, side key

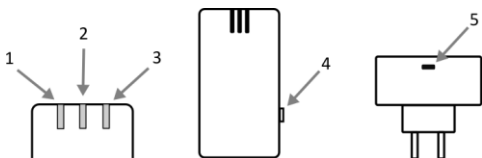

Nr	Element
1	LED1 power supply (on/off)
2	LED2 DECT Link Quality (3 colors)
3	LED3 active call in REP (on/off)
4	side key(Reset, special for multicall HS)
5	USB connector (SW Upgrade)

Software Upgrade

Software Upgrades for DA1275 can be downloaded via USB connector and USB cable to PC. Please search your Supplier's website to get information about such Software Upgrades

FAQ Questions and Answers

Please contact the respective Websites of manufacturer and/or Supplier. Here you can find Technical Support and FAQs.

Registration via PC APP

In case System Code (=DECT PIN) of Base Station is not "0000", you must use the Product PC APP for registration to Base.

You can download this PC APP including instructions from Internet www.da-products.de/products/repeater/da1275-dect-repeater or from Product Internet Support page of your Dealer.

Security Advices

Make sure your DA1275 is not exposed to heat and interference from electrical devices e.g. motors and transformers.

DA1275 shall be not be placed close to metallic walls.

Place DA1275 in wall sockets only with LEDs on top.

Protect your DA1275 from wet conditions, dust and aggressive liquids and acride fumes.

Use soft and wet wipes for cleaning the product. Never use detergents.

Only qualified and authorised service personal are allowed to open and repair the product.

If you hand the product to further person, do not forget to hand this manual with the product

Warranty

Your dealer warrants for 2 years for material and manufacturing quality of the product. Appointed date is the date of Buyer's receipt.

The Buyer has the right for repair or replacement.

Returned and replaced products will pass its property to the Seller. In case of defects Buyer has to immediately inform the Seller about such defects.

Warranty claims must be made evident via original receipt.

Any defect caused by incorrect handling, usage and caused by physical stress or other incorrect environmental conditions are not subject to warranty claims.

Recycling

Please contact your Seller regarding Recycling of your product. In no case get disposed of your product via household garbage



Manual for DA1275 DECT Repeater

English Version 1.0 Edition 05

April 2018

Editor

DOSCH&AMAND Products GmbH Munich

CE Conformity

This product fulfills the requirements of EU rules 2004/108/EG (Richtlinie des Europäischen Parlaments und des Rates zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über die elektromagnetische Verträglichkeit und zur Aufhebung der Richtlinie 89/336/EWG), and 2006/95/EG (Richtlinie des Europäischen Parlaments und des Rates zur Angleichung der Rechtsvorschriften der Mitgliedstaaten betreffend elektrische Betriebsmittel zur Verwendung innerhalb bestimmter Spannungsgrenzen). The conformity with a.m. rules is confirmed by the CE sign. The CE Conformity Declaration and Manufacturer's Declaration can be viewed under following address :

DOSCH&AMAND Products GmbH, Neumarkterst. 18, 81673 Munich



Technical Support

More technical support can be supplied via Service Number of your Dealer

Please consult the Dealer's website for respective Tel Number.